

ISUZU

N-F Series

Version Euro VI OBD-C



Série Bleu 

VERSION 2019



Index

N SERIES

3,5 ton	4-9
5,5 ton	10-11
6,5 ton	12-13
7,5 ton	14-19
9,5 ton	20-21


F SERIES

11 ton	22-25
12 ton	26-27
14 ton	28-31

PRICES EX-WORKS FRANCO CERIA – PRICES EXCLUDED VAT

Note: Dimensions and weight are given as guide only. Bodybuilders are responsible for ensuring all legal requirements are met. Isuzu shall have no liability whatsoever should information supplied have incorrect data, description or illustrations.

DIMENSIONS (mm)

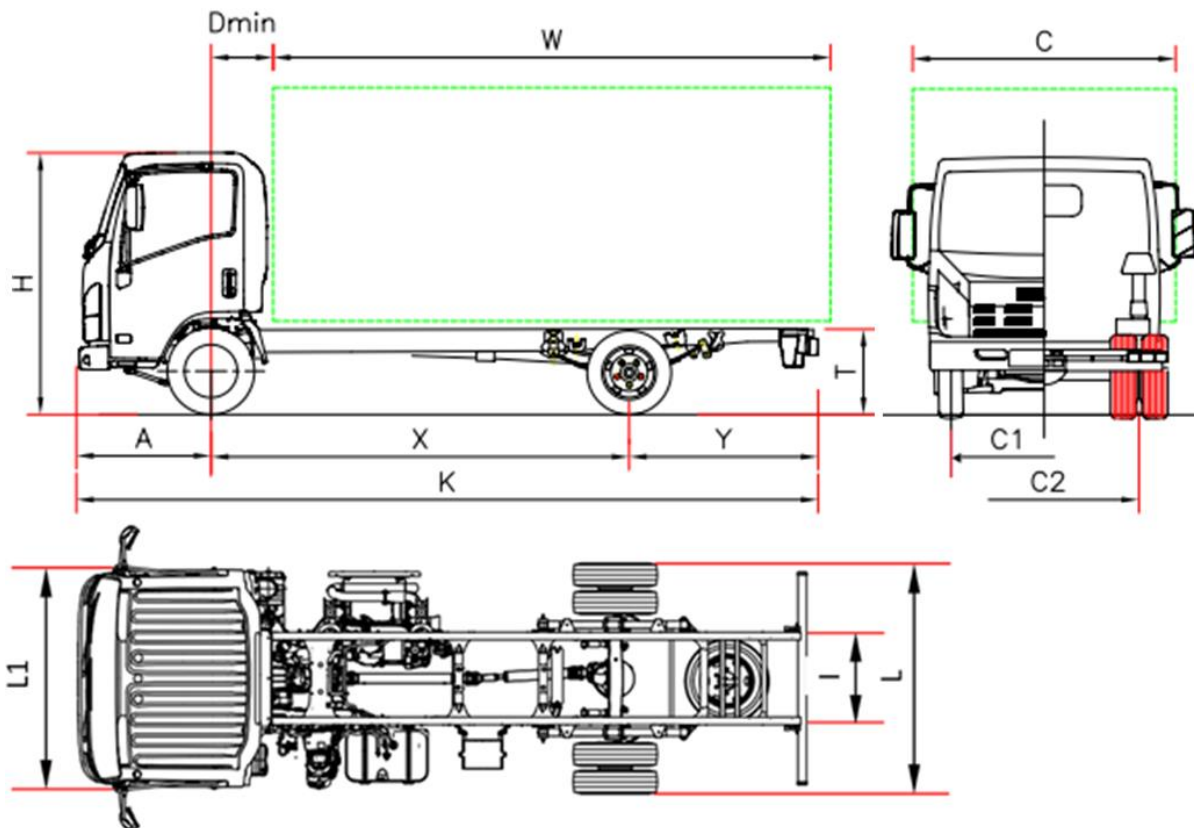

MODEL NAME		L35 F	L 35 H	L 35 K	L 35 L
Wheelbase	X	2750	3350	3845 ⁽⁵⁾	4175 ⁽⁵⁾
Overall length	K	5295	6015	7032	7565
Body length min ⁽¹⁾	W	3535	4255	5272	5805
Body length max ⁽¹⁾	W	3865	4490	5507	6040
Rear overhang	Y	1435	1555	2077	2280
Chassis height (unladen)	T	730	720	720	720
Overall height (unladen)	H	2150	2160	2160	2160
Rear axle width	L	1865			
Cab width ⁽²⁾	L1	1815			
Body width ⁽³⁾	C	2120			
Front axle to back of cab	Dmin	650			
Front overhang	A	1110			
Frame internal size	I	700			
Front track	C1	1475			
Rear track	C2	1425			
Minimum Road Clearance	-	190			
Turning diameter (m) ⁽⁶⁾	-	11,3	13,5	15,2	16,4
WEIGHT (kg)					
Unladen weight ⁽⁴⁾		2235	2265	2315	2365
Unladen weight front axle		1575	1565	1590	1615
Unladen weight rear axle		660	700	725	750
Gross vehicle weight		3500			
Front/rear total weight		2100 / 2435			
Max trailer weight unbraked/braked		750 / 3500			
<ol style="list-style-type: none"> 1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). 2. Excluding turn signal and side mirrors. 3. Possible widths with optional mirror brackets : 1865/1945 – 1945/2120 – 2120/2275 4. The Unladen weight include spare wheel, full fuel tank and driver 75 kg 5. Wheelbase modified (see thw optional equipment) 6. Curb to curb turning diameter 					

Série Bleu OBD-C – 3,5 ton


W/B (mm) F 2750 – H 3350

NOVEMBER 2019

€ 29.220,00 VAT excluded

Equipment	NEES 2 (only F wheelbase)	€ 1.290,00 VAT excluded
	Right hand drive (only W/B F and NEES 2) (after request about availability and delivery time)	
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Warning reverse • Immobilizer • Central locking with remote control • Suspension seat • Electric windows • Fog lamps • Radio with Bluetooth – USB DAB+ • Head lamps control leveling • Daytime running light • Steering wheel adjustable for height and depth 	
Optional equipment	Air conditioning Wheelbase modified	Ask to your dealer
Engine	ISUZU 4JJ1E6N Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 2999 cm ³ Power max 110Kw (150 HP) at 2800 rpm Torque max 375 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C	
Tank capacity	ABS con BAS – Brake assist system ESC– Electronic stability control with ASR SRS air-bag driver	
Safety system	Lt 68 (W/B F) / Lt 93 (W/B H)	Lt 16 Ad-Blue®
Transmission ratios	5 gear MYY5A – 5.315 – 2.908 – 1.558 – 1.000 – 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 65 mm, height 180 mm, thickness 4 mm	
Axle	2, the rear one with twin wheels.	
Seat number	3	
Tire	205/75 R16C front and simple; 205/75C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tensios a 24V – Generator 90°, Nr. 2 battery 70 Ah	

DIMENSIONS (mm)

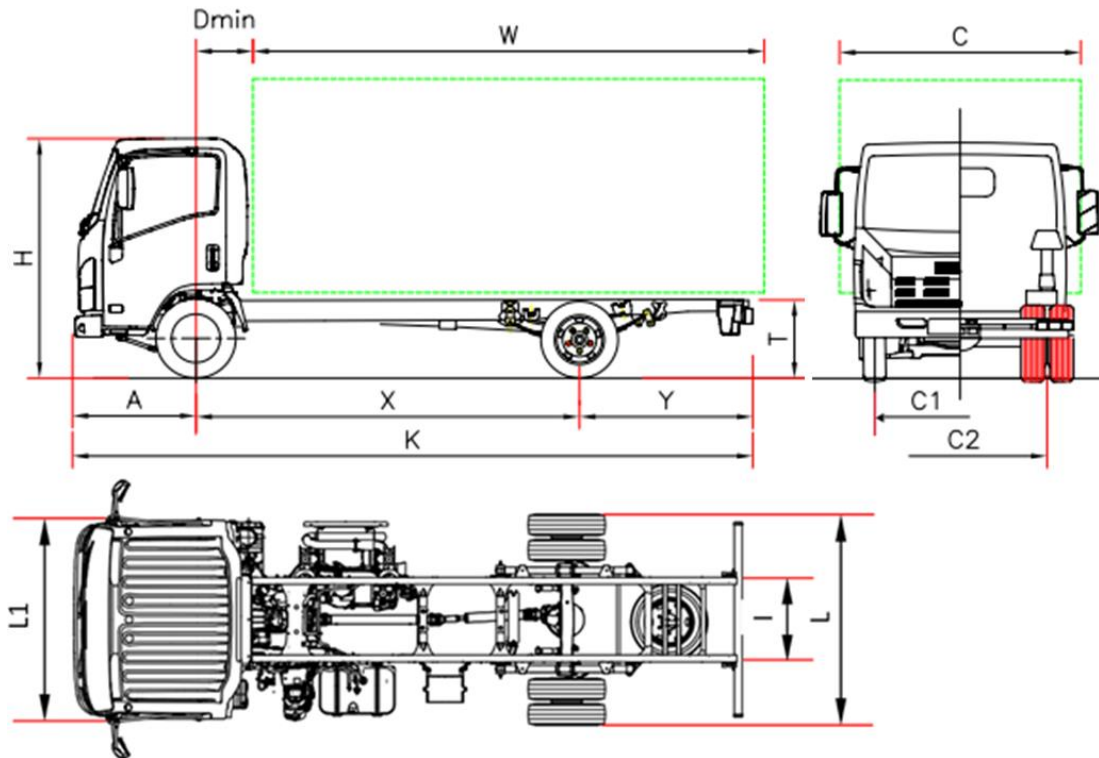

MODEL NAME		L 35 F S	L 35 H S
Wheelbase	X	2760	3360
Overall length	K	5295	6015
Body length min ¹	W	3545	4265
Body length max ¹	W	3830	4500
Rear overhang	Y	1435	1555
Chassis height (unladen)	T		715
Overall height (unladen)	H	2150	2160
Rear axle width	L		1860
Cab width ²	L1		1815
Body width ³	C		2120
Front axle to back of cab	Dmin		650
Front overhang	A		1100
Frame internal size	I		700
Front track	C1		1400
Rear track	C2		1425
Minimum Road Clearance	-		180
Turning diameter (m) ⁽⁵⁾	-	10,0	11,9
WEIGHT (kg)			
Unladen weight ⁴		2055	2085
Unladen weight front axle		1460	1460
Unladen weight rear axle		595	625
Gross vehicle weight		3500	
Front/rear total weight		2100 / 2435	
Max trailer weight unbraked/braked		750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors.
3. Possible widths with optional mirror brackets : 1860/1945 – 1945/2120 – 2120/2275
4. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: F 2225 Kg (1560/665); H 2275 Kg (1574/701). NEES +35 Kg (25/10)
5. Curb to curb turning diameter


W/B (mm) F 2760 - H 3360

NOVEMBER 2019

€ 30.030,00 VAT excluded

Equipment	Automated transmission NEES 2 (W/B H)	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Suspension seat • Warning reverse • Immobilizer • Central locking with remote control • Electric windows • Radio with Bluetooth – USB DAB+ • Fog lamps • Head lamps control leveling • Daytime running light • Steering wheel adjustable for height and depth 	
Optional equipment	Air conditioning	
Engine	ISUZU 4JJ1E6N Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 2999 cm ³ Power max 110kW (150 HP) at 2800 rpm Torque max 375 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C	
Tank capacity	ABS con BAS – Brake assist system ESC– Electronic stability control with ASR SRS air-bag driver	
Safety system	Lt 68 (W/B F) / Lt 93 (W/B H)	Lt 16 Ad-Blue®
Transmission ratios	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 50 mm, height 180 mm, thickness 4 mm	
Seat number	3	
Axle	2, the rear one with twin wheels.	
Tire	205/75 R16C front and simple; 205/75 R16C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front: Independent suspension with coil spring and double wishbone. Rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 70 Ah	

DIMENSIONS (mm)

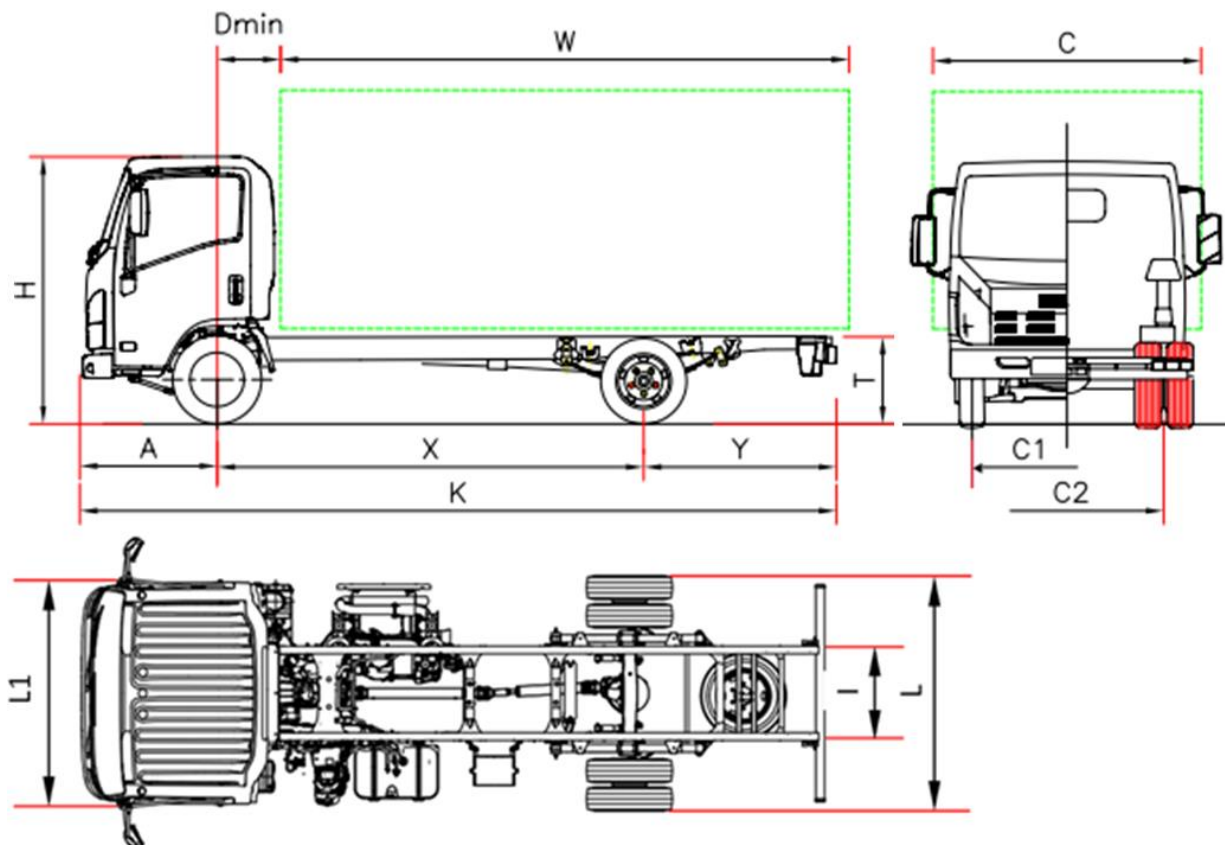

MODEL NAME		N 35 F	N 35 H	N 35 K	N 35 L
Wheelbase	X	2800	3395	3845 ⁽⁵⁾	4175 ⁽⁵⁾
Overall length	K	5235	6085	7032	7565
Body length min ⁽¹⁾	W	3420	4265	5212	5745
Body length max ⁽¹⁾	W	3715	4555	5442	5970
Rear overhang	Y	1330	1595	2077	2280
Chassis height (unladen)	T	725	720	720	720
Overall height (unladen)	H	2225			
Rear axle width	L	1925			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	Dmin	710 ⁽⁷⁾			
Front overhang	A	1110			
Frame internal size	I	750			
Front track	C1	1680			
Rear track	C2	1485			
Minimum Road Clearance	-	190			
Turning diameter (m) ⁽⁶⁾	-	10,0	11,8	13,2	14,2
WEIGHT (kg)					
Unladen weight ⁽⁴⁾		2225	2255	2335	2375
Unladen weight front axle		1525	1560	1600	1610
Unladen weight rear axle		700	695	735	765
Minimum weight vehicle equipped					
Gross vehicle weight		3500			
Front/rear total weight		2100 / 2435			
Max trailer weight unbraked/braked		750 / 3500			

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
- Excluding turn signal and side mirrors
- Possible widths with optional mirror brackets 2040/2170 – 2170/2345 – 2345/2500
- The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: F 2394 Kg (1623/771); H 2432 Kg (1666/766); K 2512 kg (1706/806); L 2552 kg (1716/836). NEES +35 Kg (25/10)
- Wheelbase modified (see the optional equipment)
- With NEES 2: Dmin 650
- Curb to curb turning diameter

Série Bleu OBD-C - 3,5 ton


W/B (mm) F 2800 - H 3395 - K 3845 – L 4175

NOVEMBER 2019

€ 30.690,00 VAT excluded

Equipment	Automated transmission NEES 2	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Side mirrors heated and electric • Warning reverse • Immobilizer • Central locking with remote control • Electric windows • Suspension seat • Radio with Bluetooth – USB DAB+ • Fog lamps • Head lamps control leveling • Daytime running light • Steering wheel adjustable for height and depth • Header Tray and sunvisor only at driver side 	
Optional equipment	Air conditioning Wheelbase modified	Ask to your dealer
Engine	ISUZU 4JJ1E6N Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 2999 cm ³ Power max 110kW (150 HP) at 2800 rpm Torque max 375 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C	
Safety system	ABS con BAS – Brake assist system ESC– Electronic stability control with ASR SRS air-bag driver	
Tank capacity	Lt 90	Lt 16 Ad-Blue®
Transmission ratios	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 3.909 (43/11)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 70 mm, height 214 mm, thickness 5 mm	
Seat number	3	
Axle	2, the rear one with twin wheels.	
Tire	205/75 R16C front and simple; 205/75 R16C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 70 Ah	

DIMENSIONS (mm)

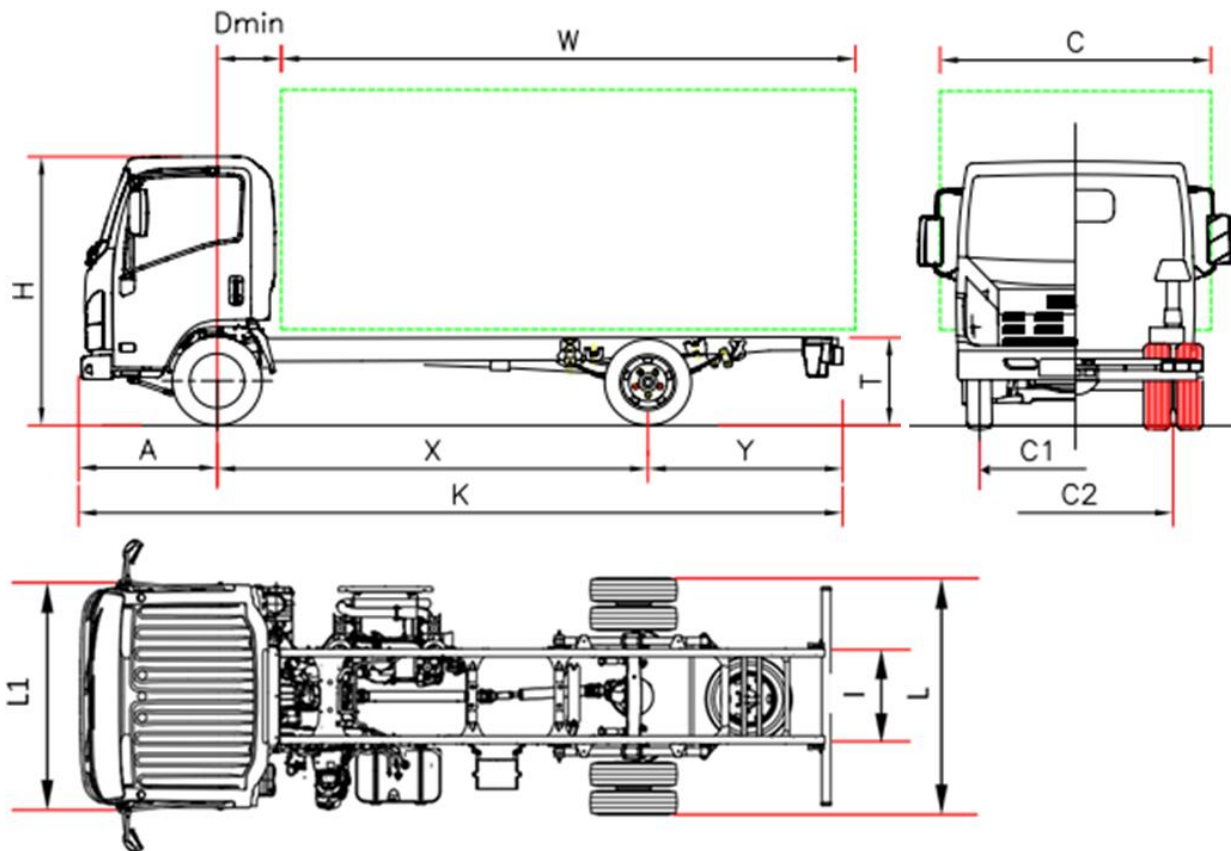

MODEL NAME		M 55 E	M 55 F	M 55 H
Wheelbase	X	2500 ⁽⁵⁾	2750	3350
Overall length	K	5045	5295	6020
Body length min ⁽¹⁾	W	3285	3535	4255
Body length max ⁽¹⁾	W	3475	3866	4485
Rear overhang	Y	1435	1435	1555
Chassis height (unladen)	T	740	740	735
Overall height (unladen)	H	2150	2150	2160
Rear axle width	L		1865	
Cab width ⁽²⁾	L1		1815	
Body width ⁽³⁾	C		2120	
Front axle to back of cab	Dmin		650	
Front overhang	A		1110	
Frame internal size	I		700	
Front track	C1		1475	
Rear track	C2		1425	
Minimum Road Clearance	-		190	
Turning diameter (m) ⁽⁶⁾	-	10,4	11,3	13,5
WEIGHT (kg)				
Unladen weight ⁽⁴⁾		2235	2235	2280
Unladen weight front axle		1555	1555	1560
Unladen weight rear axle		680	680	720
Gross vehicle weight			5500	
Front/rear total weight			2100 / 3980	
Max trailer weight unbraked/braked			750 / 3500	
<ol style="list-style-type: none"> 1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). 2. Excluding turn signal and side mirrors 3. Possible widths with optional mirror brackets 1865/1945 – 1945/2120 – 2120/2275 4. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: F 2302 Kg (1606/696); H 2347 Kg (1615/732). NEES +35 Kg (25/10) 5. Modified wheelbase (see optional equipment) 6. Curb to curb turning diameter 				

Série Bleu OBD-C - 5,5 ton

W/B (mm) E 2500 - F 2750 - H 3350


NOVEMBER 2019

€ 36.390,00 VAT excluded

Equipment	Automated transmission NEES 2 Right hand drive W/B F NEES 2 (after request about availability and delivery time)	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Warning reverse • Immobilizer • Central locking with remote control • Electric windows • Suspension seat • Radio with Bluetooth – USB DAB+ • Fog lamps • Head lamps control leveling • Daytime running light • Steering wheel adjustable for height and depth • Speed limiter (90km/h)
Optional equipment	Air conditioning Modified wheelbase	Ask to your dealer
Engine	ISUZU 4JJ1E6N Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 2999 cm ³ Power max 110kW (150 HP) at 2800 rpm Torque max 375 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C	
Tank capacity	ABS ESC – Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bag driver	
Safety system	Lt 68 W/B F; Lt 93 W/B H	Lt 16 Ad-Blue®
Transmission ratios	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 4.300 (43/10)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 65 mm, height 180 mm, thickness 4 mm	
Seat number	3	
Axle	2, the rear one with twin wheels.	
Tire	205/75 R16C front and simple; 205/75 R16C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 70 Ah	

Série Bleu OBD-C - 6,5 ton

DIMENSIONS (mm)

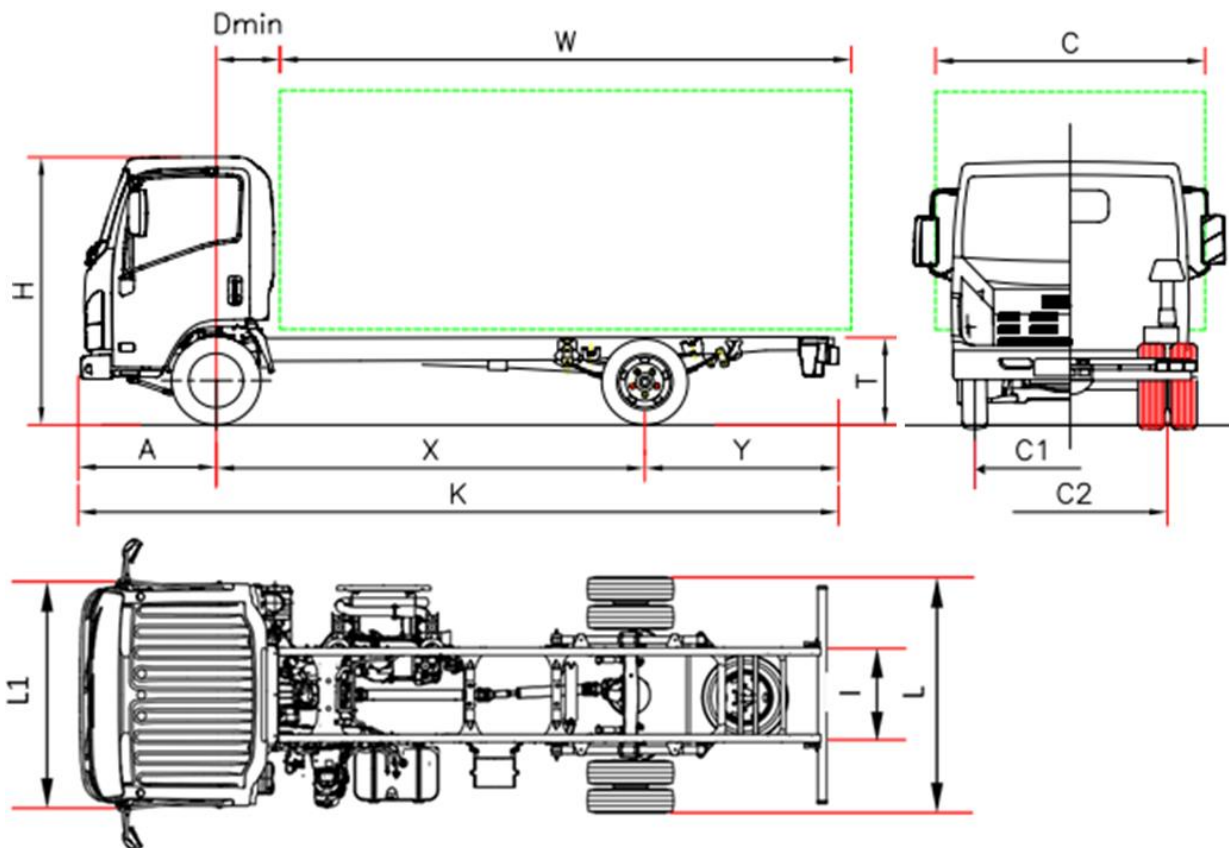

MODEL NAME		P 65 H	P 65 K
Wheelbase	X	3395	3845
Overall length	K	6090	6735
Body length min ⁽¹⁾	W	4265	4915
Body length max ⁽¹⁾	W	4550	5205
Rear overhang	Y	1580	1780
Chassis height (unladen)	T	800	800
Overall height (unladen)	H		2250
Rear axle width	L		1990
Cab width ⁽²⁾	L1		2040
Body width ⁽³⁾	C		2345
Front axle to back of cab	Dmin		710 ⁽⁷⁾
Front overhang	A		1110
Frame internal size	I		750
Front track	C1		1680
Rear track	C2		1525
Minimum Road Clearance	-		210
Turning diameter (m) ⁽⁶⁾	-	12,7	14,2
WEIGHT (kg)			
Unladen weight ⁽⁴⁾		2515	2545
Unladen weight front axle		1670	1660
Unladen weight rear axle		845	885
Gross vehicle weight ⁽⁵⁾			6500
Front/rear total weight			3100 / 4600
Max trailer weight unbraked/braked			750 / 3500

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
- Excluding turn signal and side mirrors
- Possible widths with optional mirror brackets 2040/2170 – 2170/2345 – 2345/2500
- The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: H 2599 Kg (1735/864); K 2629 Kg (1725/904). Cambio NEES +35 Kg (25/10)
- For gross vehicle weight of 6,0 ton, see the supplementary single test supplement.
- Curb to curb turning diameter
- With NEES 2: Dmin 650

Série Bleu OBD-C - 6,5 ton

W/B (mm) H 3395 - K 3845


NOVEMBER 2019

€ 39.420,00 VAT excluded

Equipment	Automated transmission NEES 2	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Side mirrors heated and electric • Warning reverse • Immobilizer • Central locking with remote control • Electric windows • Suspension seat • Radio with Bluetooth – USB DAB+ • Fog lamps • Head lamps control leveling • Daytime running light • Steering wheel adjustable for height and depth • Speed limiter (90km/h) 	
Optional equipment	Air conditioning	
Engine	<p>ISUZU 4JJ1E6N Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 2999 cm³ Power max 110kW (150 HP) at 2800 rpm Torque max 375 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C</p>	
Tank capacity	<p>ABS ESC – Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bags driver and passenger</p>	
Safety system	Lt 90	Lt 16 Ad-Blue®
Transmission ratios	6 gear MYY6S – 5.979 - 3.434 - 1.832 - 1.297 - 1.000 - 0.759; Reverse 5.068; Final gear ratio 4.556 (41/9)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 70 mm, height 214 mm, thickness 5 mm	
Seat number	3	
Axle	2, the rear one with twin wheels.	
Tire	215/75 R17,5C front and simple; 215/75 R17,5C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 70 Ah	

150cv Série Bleu OBD-C - 7,5 ton

DIMENSIONS (mm)

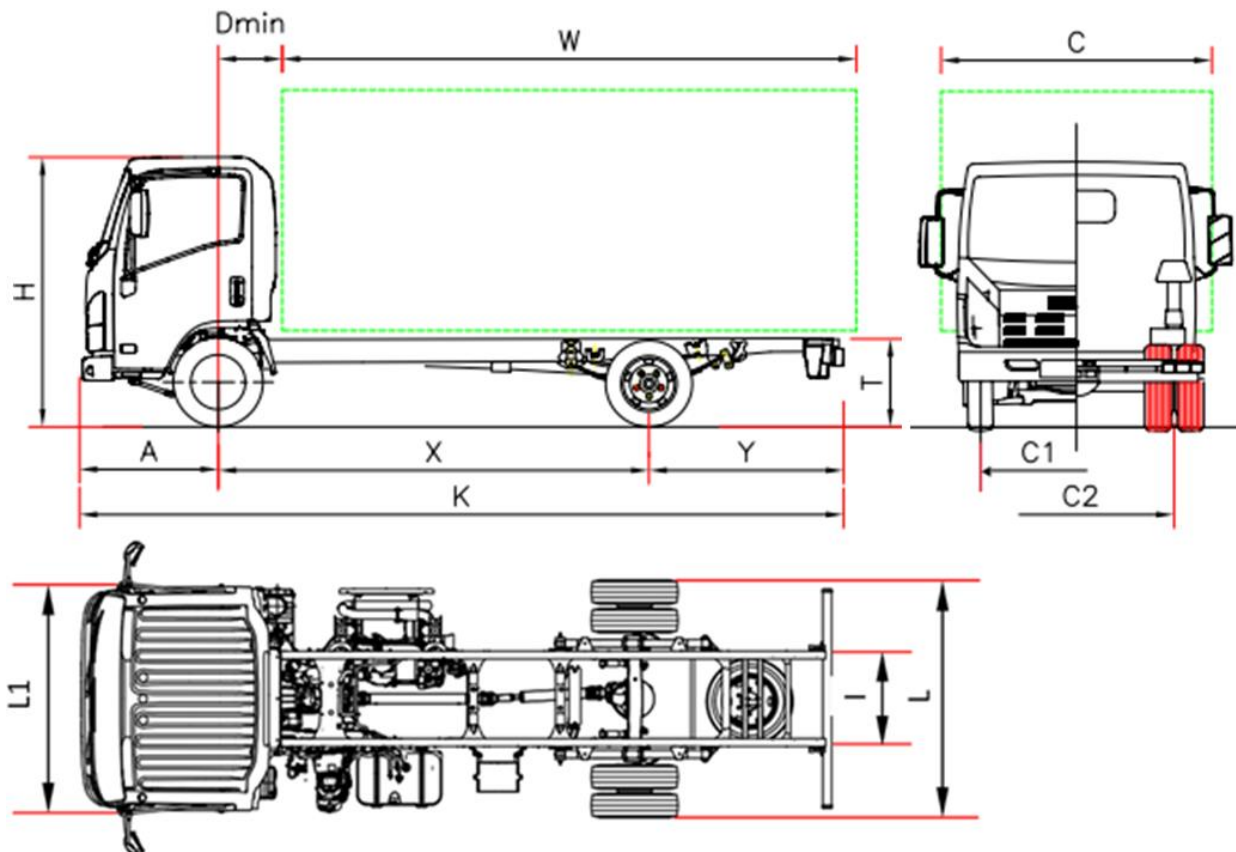

MODEL NAME		P 75 F	P 75 H	P 75 K	P 75 M
Wheelbase	X	2900 ⁽⁵⁾	3365	3815	4475
Overall length	K	5575	6040	6690	7870
Body length min ⁽¹⁾	W	3750	4215	4865	6045
Body length max ⁽¹⁾	W	4065	4530	5180	6360
Rear overhang	Y	1560	1560	1760	2280
Chassis height (unladen)	T	800			
Overall height (unladen)	H	2265			
Rear axle width	L	2115			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	Dmin	710 ⁽⁷⁾			
Front overhang	A	1110			
Frame internal size	I	850			
Front track	C1	1680			
Rear track	C2	1650			
Minimum Road Clearance	-	210			
Turning diameter (m) ⁽⁶⁾	-	11,1	12,6	14,1	16,3
WEIGHT (kg)					
Unladen weight ⁽⁴⁾		2620	2620	2640	2695
Unladen weight front axle		1665	1665	1695	1765
Unladen weight rear axle		995	955	945	930
Gross vehicle weight		7500			
Front/rear total weight		3100 / 6000			
Max trailer weight unbraked/braked		750 / 3500			

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
- Excluding turn signal and side mirrors
- Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
- The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: F H 2705 Kg (1730/975); K 2727 Kg (1762/965); M 2780 Kg (1830/950). NEES +35 Kg (25/10)
- Wheelbase modified (see optional equipment)
- Curb to curb turning diameter
- With NEES 2: Dmin 650.

150cv Série Bleu OBD-C - 7,5 ton

W/B (mm) F 2900 - H 3365 - K 3815 - M 4475

NOVEMBER 2019

€ 40.104,00 VAT excluded

Equipment	Automated transmission NEES 2 Right hand drive W/B H (after request about availability and delivery time)	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Side mirrors heated and electric • Warning reverse • Immobilizer • Central locking with remote control • Electric windows • Suspension seat • Radio with Bluetooth – USB DAB+ • Fog lamps • Head lamps control leveling • Daytime running light • Steering wheel adjustable for height and depth • Speed limiter (90km/h) 	
Optional equipment	Air conditioning Wheelbase modified	Ask to your dealer
Engine	ISUZU 4JJ1E6N Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 2999 cm ³ Power max 110kW (150 HP) at 2800 rpm Torque max 375 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C	
Tank capacity	ABS ESC – Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bags driver and passenger	
Safety system	Lt 90	Lt 16 Ad-Blue®
Transmission ratios	6 gear MYY6S – 5.979 - 3.434 - 1.832 - 1.297 - 1.000 - 0.759; Reverse 5.068; Final gear ratio 5.571 (39/7)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 70 mm, height 216 mm, thickness 6 mm	
Seat number	3	
Axle	2, the rear one with twin wheels.	
Tire	215/75 R17,5C front and simple; 215/75 R17,5C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 100 Ah	

DIMENSIONS (mm)						
MODEL NAME		P 75 F	P 75 H	P 75 K	P 75 M	P 75 Q
Wheelbase	X	2900 ⁽⁵⁾	3365	3815	4475	5300 ⁽⁵⁾
Overall length	K	5570	6040	6690	7870	9250
Body length min ⁽¹⁾	W	3750	4215	4865	6045	7430
Body length max ⁽¹⁾	W	4065	4530	5180	6360	7745
Rear overhang	Y	1560	1560	1760	2280	2840
Chassis height (unladen)	T	800				
Overall height (unladen)	H	2265				
Rear axle width	L	2115				
Cab width ⁽²⁾	L1	2040				
Body width ⁽³⁾	C	2345				
Front axle to back of cab	Dmin	650				
Front overhang	A	1110				
Frame internal size	I	850				
Front track	C1	1680				
Rear track	C2	1650				
Turning diameter (m) ⁽⁶⁾	-	11,1	12,6	14,1	16,3	19,0
WEIGHT (kg)						
Unladen weight ⁽⁴⁾		2830	2830	2850	2905	3025
Unladen weight front axle		1840	1830	1860	1930	1970
Unladen weight rear axle		990	1000	990	975	1055
Gross vehicle weight		7500				
Front/rear total weight		3100 / 6000				
Max trailer weight unbraked/braked		750 / 3500				
<ol style="list-style-type: none"> The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). Excluding turn signal and side mirrors Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500 The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: F 2945 kg (1918/1027); H 2945 Kg (1908/1037); K 2967 Kg (1940/1027); M 3020 Kg (2008/1012); Q 3140 kg (2058/1082). NEES +35 Kg (25/10) Wheelbase modified (see optional equipment) Curb to curb turning diameter 						

190cv Série Bleu OBD-C - 7,5 ton


W/B (mm) F 2900 - H 3365 - K 3815 - M 4475 - Q 5300

NOVEMBER 2019

€ 42.204,00 VAT excluded

Equipment	Automated transmission NEES 2 with Cruise Control Right hand drive W/B H NEES 2 (after request about availability and delivery time)	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Warning reverse • Immobilizer • Central locking with remote control • Suspension seat • Radio with Bluetooth – USB DAB+ • Fog lamps • Head lamps control leveling • Daytime running light • Electric windows • Steering wheel adjustable for height and depth • Speed limiter (90km/h)
Optional equipment	Air conditioning Wheelbase modified	Ask to your dealer
Engine	ISUZU 4HK1E6C Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 5193 cm ³ Power max 140kW (190 HP) at 2600 rpm Torque max 510 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C	
Tank capacity	ABS ESC– Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bags driver and passenger	
Safety system	Lt 90	Lt 16 Ad-Blue®
Transmission ratios	6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse 6.369; Final gear ratio 4.100 (41/10)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 70 mm, height 216 mm, thickness 6 mm	
Seat number	3	
Axle	2, the rear one with twin wheels.	
Tire	215/75 R17,5C front and simple; 215/75 R17,5C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 100 Ah	

DIMENSIONS (mm)

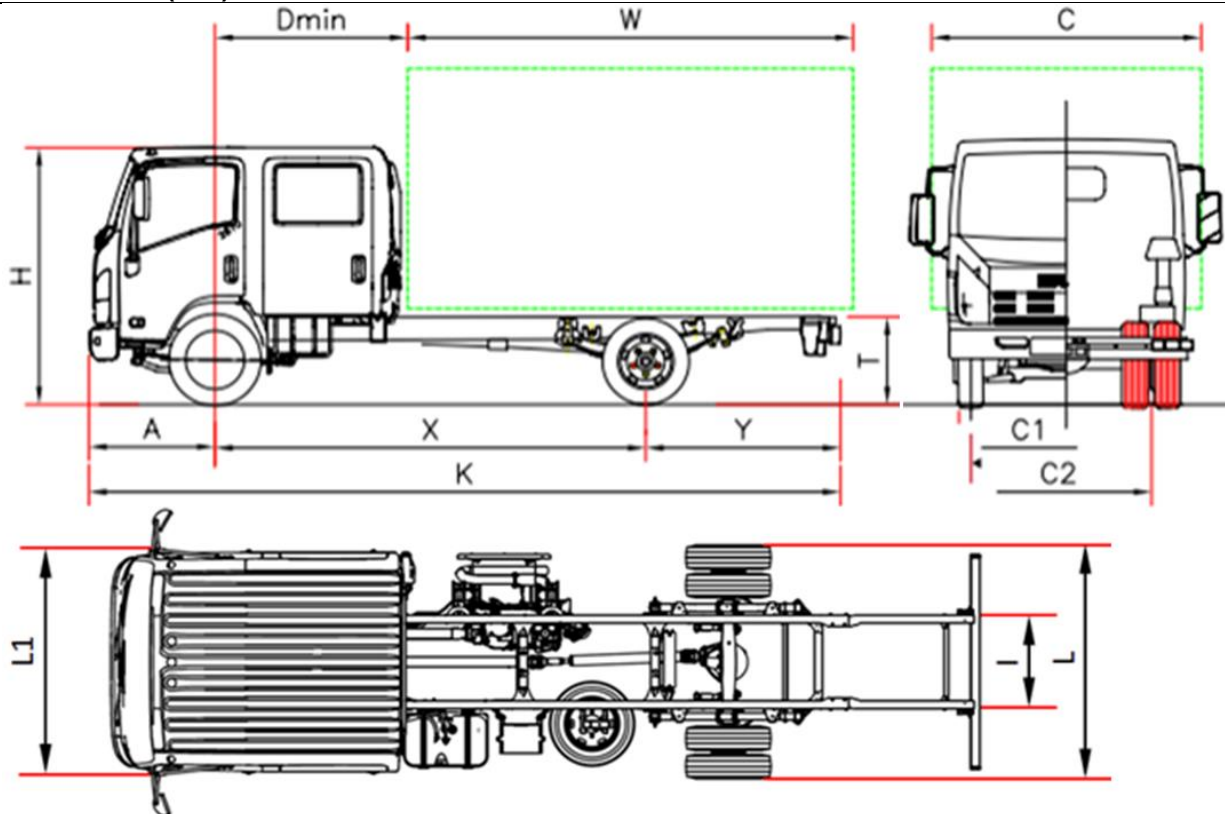

MODEL NAME		P 75 H	P 75 M	P 75 Q
Wheelbase	X	3365 ⁽⁵⁾	4475	5300 ⁽⁵⁾
Overall length	K	6040	7870	9250
Body length min ⁽¹⁾	W	3225	5055	6440
Body length max ⁽¹⁾	W	3540	5370	6755
Rear overhang	Y	1560	2280	2840
Chassis height (unladen)	T		800	
Overall height (unladen)	H		2280	
Rear axle width	L		2115	
Cab width ⁽²⁾	L1		2040	
Body width ⁽³⁾	C		2345	
Front axle to back of cab	Dmin		1700	
Front overhang	A		1110	
Frame internal size	I		850	
Front track	C1		1680	
Rear track	C2		1650	
Minimum Road Clearance	-		210	
Turning diameter (m) ⁽⁶⁾	-	12,6	16,3	19,0
WEIGHT (kg)				
Unladen weight ⁽⁴⁾		3160	3160	3280
Unladen weight front axle		2120	2090	2140
Unladen weight rear axle		1040	1070	1140
Gross vehicle weight			7500	
Front/rear total weight			3100 / 6000	
Max trailer weight unbraked/braked			750 / 3500	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2500
4. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. Full optional unladen weight for wheelbase: H 3271 kg (2194/1077); M 3271 kg (2164/1107); Q 3391 kg (2214/1177). NEES +35 Kg (25/10)
5. Wheelbase modified (see optional equipment)
6. Curb to curb turning diameter

190cv Série Bleu OBD-C - 7,5 ton


W/B (mm) H 3365 - M 4475 - Q 5300

NOVEMBER 2019

€ 43.440,00 VAT excluded

Equipment	Automated transmission NEES 2 with Cruise Control	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Engine exhaust brake • Side mirrors heated and electric • Warning reverse • Immobilizer • Central locking with remote control • Electric windows • Speed limiter (90km/h) • Fog lamps • Head lamps control leveling • Daytime running light • Radio with Bluetooth – USB DAB+ • Steering wheel adjustable for height and depth 	
Optional equipment	Air conditioning Wheelbase modified	Ask to your dealer
Engine	<p>ISUZU 4HK1E6C Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 5193 cm³ Power max 140kW (190 HP) at 2600 rpm Torque max 510 Nm/1600 – 2800 rpm Emission level EURO VI update OBD-C</p>	
Tank capacity	<p>ABS ESC– Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bags driver and passenger</p>	
Safety system	Lt 90	Lt 16 Ad-Blue®
Transmission ratios	<p>6 gear MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782; Reverse: 6.369; Final gear ratio 4.100 (41/10)</p>	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 70 mm, height 216 mm, thickness 6 mm	
Seat number	7	
Axle	2, the rear one with twin wheels.	
Tire	215/75 R17,5C front and simple; 215/75 R17,5C rear and dual	
Brake	Front and rear: ventilated discs with asbestos-free linings. Mechanical drum brake rear of transmission. Brake type: ABS divided hydraulic, vacuum servo assisted with electronic brake distribution.	
Suspension	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.	
Electrical system	Nominal tension a 24V - Generator 90A, Nr. 2 battery 100 Ah	

DIMENSIONS (mm)

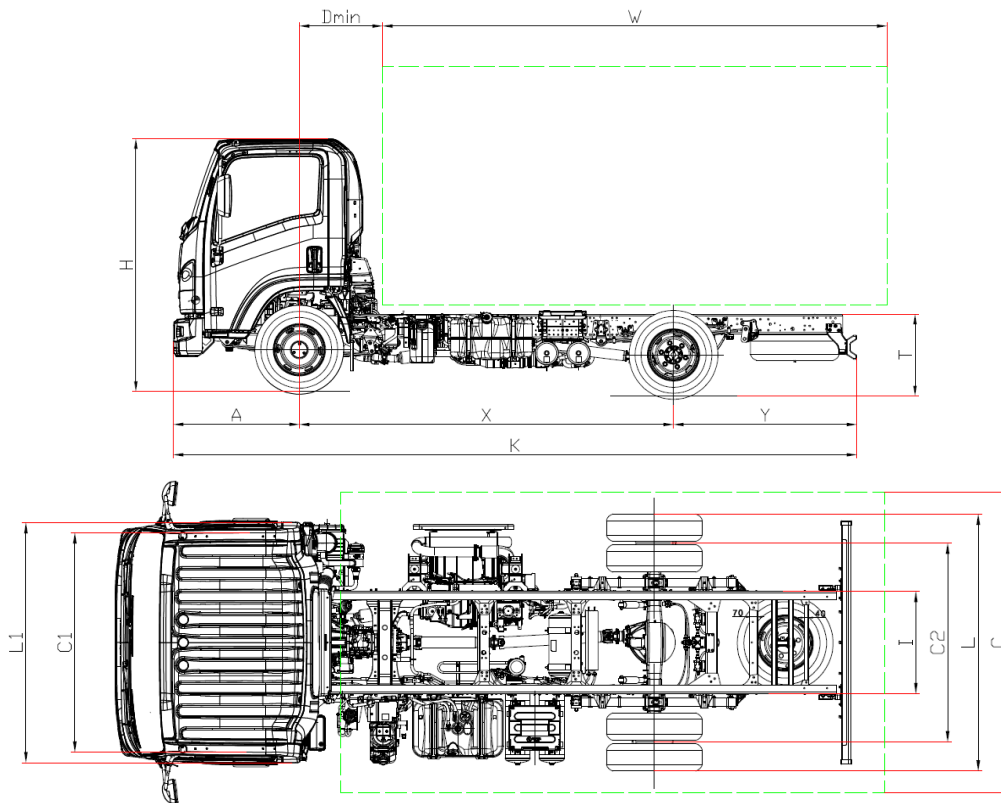

MODEL NAME		Q 95 F	Q 95 H	Q 95 K	Q 95 M
Wheelbase	X	3000 ⁽⁵⁾	3365	3815	4475
Overall length	K	5758	6123	6773	7953
Body length min ⁽¹⁾	W	3920	4285	4935	6115
Body length max ⁽¹⁾	W	4100	4635	5285	6465
Rear overhang	Y	1630	1630	1830	2350
Chassis height	T	830 (on rear axle)			
Overall height	H	2275			
Rear axle width	L	2129			
Cab width ⁽²⁾	L1	2040			
Body width ⁽³⁾	C	2345			
Front axle to back of cab	Dmin	710			
Front overhang	A	1128			
Frame internal size	I	850			
Front track	C1	1746			
Rear track	C2	1650			
Minimum Road Clearance	-	195			
WEIGHT (kg)					
Unladen weight ⁽⁴⁾		3305 (kg)	3305 (kg)	3345 (kg)	3375 (kg)
Unladen weight front axle		2120 (kg)	2120 (kg)	2135 (kg)	2150 (kg)
Unladen weight rear axle		1185 (kg)	1185 (kg)	1210 (kg)	1225 (kg)
Minimum weight vehicle equipped		3780 (kg)	3548 kg		
Gross vehicle weight		9500 kg			
Front/rear total weight		3400 / 6800 kg			
Max trailer weight unbraked/braked		750 3500 kg			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle. Dimensions declared in C.O.C. with no chassis modifications (please contact the homologation department for chassis modified dimensions).
2. Excluding turn signal and side mirrors.
3. Possible widths with optional mirror brackets 2129/2170 – 2170/2345 – 2345/2500
4. The Unladen weight include spare wheel, full fuel tank, driver. Optional not included.
5. Wheelbase modified (see optional equipment)

190cv Série Bleu OBD-C - 9,5 ton

W/B (mm) F 3000 - H 3365 - K 3815 - M 4475

NOVEMBER 2019

€ 48.600,00 VAT excluded

Equipment Automated transmission NEES 2 with Cruise Control € 1.290,00 VAT excluded

* Standard equipment may vary in the right hand drive version. Please contact the dealer.

Standard features

- EGR – DPD (Diesel particulate diffuser)
- SCR with Ad-Blue®
- Multi information display
- Engine exhaust brake
- Side mirrors heated and electric
- Manual Air condition
- Warning reverse
- Immobilizer
- Central locking with remote control
- Suspension seat
- Radio with Bluetooth – USB DAB+
- Fog lamps
- Head lamps control leveling
- Daytime running light
- Electric windows
- Steering wheel adjustable for height and depth
- Speed limiter (90 km/h)
- Spare wheel
- Idling control knob

Optional equipments

Wheelbase modified

Ask to your dealer

Engine

ISUZU 4HK1E6C Diesel, 4 cilindres, intercooler, direct injection intercooler common rail with Variable-geometry turbocharger. Displacement 5193 cm³
 Power max 140kW (190 HP) at 2600 rpm
 Torque max 510 Nm/1600 – 2800 rpm
 Emission level EURO VI Update OBD-C
 Capacity compressor 170 cm³

Safety system

ABS
ESC – Electronic stability control with ASR
LDWS – Lane Departure Warning System
AEBS (Advanced Emergency Braking System)
 SRS air-bags driver and passenger

Tank capacity

Lt 90

Lt 16 Ad-Blue®

Transmission ratios

6 gears MZZ6F 6.369 - 3.767 - 1.966 - 1.355 - 1.000 - 0.782;
 Reverse 6.369; Final gear ratio 4.777 (43/9)

Transmission control

MANUAL

NEES 2 – Automated T/M

Frame dimension

216x70x6 (mm)

Seat number

3

Axle

2, rear drive with twin wheels

Tires

Front 225/75 R17,5 129/127M simple; rear 225/75 R17,5 129/127M double

Brakes

Front and rear brake discs (∅ 330 mm). Follow CEE regulation with ABS 4 channels. Brake type: Full Air dual circuit and engine exhaust brake. Pneumatic parking brake on rear axle.

Suspension

Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.


Electrical system

Voltage rating at 24V, alternator 80A, Nr. 2 batteries 90 Ah

Clutch

12,8"

MECHANIC SUSPENSION OBD-C - 11 ton

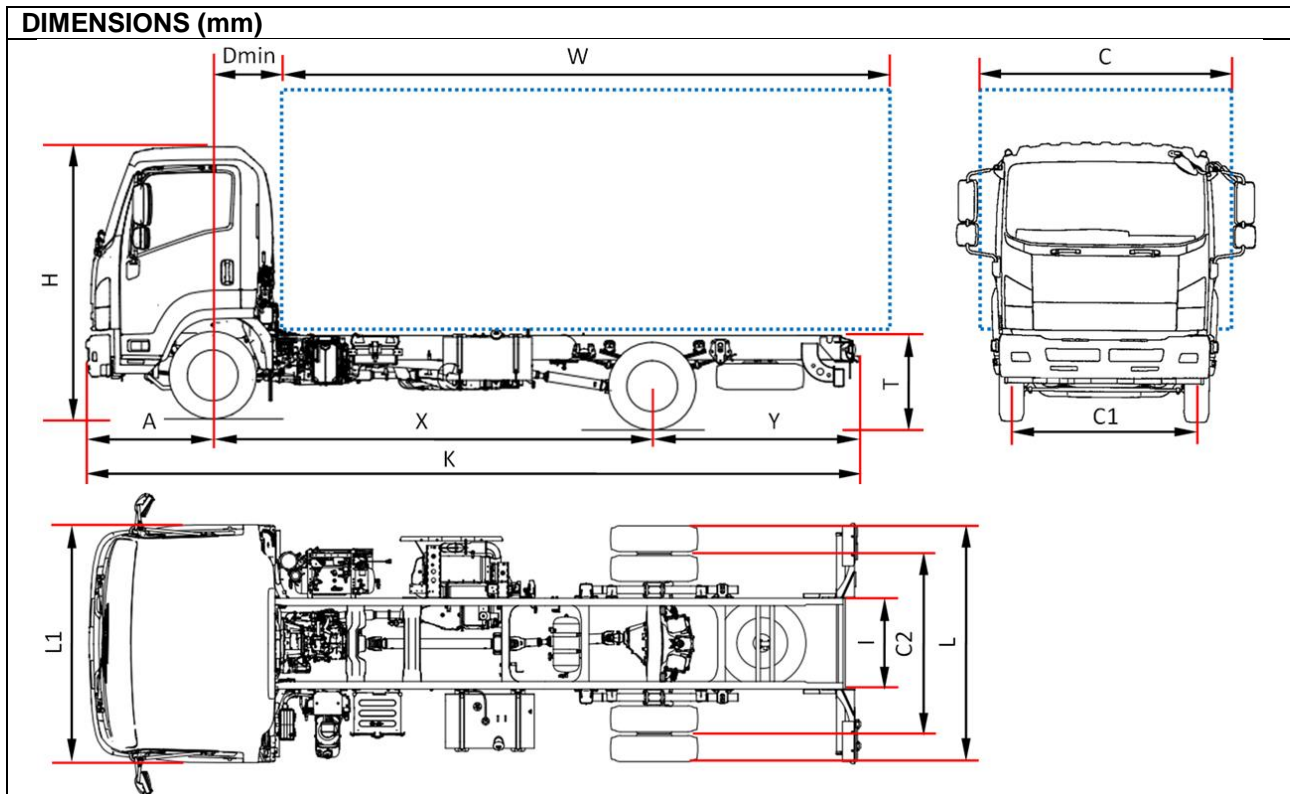

MODEL NAME		F 11 H	F 11 K	F 11 M	F 11 N
Wheelbase	X	3410	4060	4660	4990
Overall length	K	6010	7000	7900	8350
Body length min ¹	W	4130	5120	6020	6470
Body length max ¹	W	4480	5470	6370	6820
Rear overhang	Y	1430	1770	2070	2190
Chassis height (unladen)	T	875	930	930	930
Overall height (unladen)	H	2510	2510	2510	2505
Rear axle width	L	2220			
Cab width ²	L1	2195			
Body width ³	C	2500/2550			
Front axle to back of cab	Dmin	710			
Front overhang	A	1170			
Frame internal size	I	840			
Front track	C1	1795			
Rear track	C2	1660			
Minimum Road Clearance	-	185			
WEIGHT (kg)					
Unladen weight ⁴		3640	3715	3740	3780
Unladen weight front axle		2375	2370	2395	2415
Unladen weight rear axle		1265	1345	1345	1365
Minimum weight vehicle equipped		3980			
Gross vehicle weight		11000			
Front/rear total weight		4000 / 7600			
Max trailer weight unbraked/braked		750 / 3500			

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications)
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets short 2220/2286 – medium 2286/2406 – large 2406/2500
4. The Unladen weight include spare wheel, full fuel tank and driver 75 kg. AMT: +25 kg

MECHANIC SUSPENSION OBD-C - 11 ton

W/B (mm) H 3410 - K 4060 - M 4660 - N 4990

NOVEMBER 2019

€ 53.700,00 VAT excluded

Equipment	Automated transmission NEES 2 with HSA	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Air conditioning • Speed limiter (90km/h) • Rear lock differential • Head lamps control leveling • Engine exhaust brake • Radio with Bluetooth – USB DAB+ • Steering wheel adjustable for height and depth • Air suspension seat • Electric windows • Side mirrors heated and electric • Immobilizer • Central locking with remote control • Cruise control • Daytime running light • Fog lamps • Warning reverse 	
Engine	<p>ISUZU 4HK1E6C Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 5193 cm³ Power max 154kW (210HP) at 2400 rpm Torque max 706 Nm a 1600 rpm Emission level EURO VI update OBD-C</p>	
Tank capacity	Fuel	Lt 140 Ad-Blue® Lt 16
Safety system	<p>ABS ESC – Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bag driver</p>	
Transmission ratios	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 4.333 (39/9)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 60 mm, height 225 mm (only W/B H height minimum 124,6 mm), thickness 6 mm	
Seat number	3	
Axle	2, rear drive with twin wheels	
Tire	Front 235/75 R17,5 simple; rear 235/75 R17,5 double	
Brake	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: air over hydraulic dual circuit.	
Suspension	Front and rear: Multi taper leaf spring. Front and rear stabilizer shaft	
Electrical system	2 battery 110 A - System 24V - Generator 90A	

AIR SUSPENSION OBD-C - 11 ton

DIMENSIONS (mm)					
MODEL NAME		F 11A J	F 11A K	F 11A M	F 11A N
Wheelbase	X	3790	4060	4660	4990
Overall length	K	6580	7000	7900	8350
Body length min ¹	W	4700	5120	6020	6530
Body length max ¹	W	5050	5470	6370	6880
Rear overhang	Y	1620	1770	2070	2190
Chassis height (unladen)	T	760			
Overall height (unladen)	H	2505			
Rear axle width	L	2220			
Cab width ²	L1	2195			
Body width ³	C	2500/2550			
Front axle to back of cab	Dmin	710			
Front overhang	A	1170			
Frame internal size	I	840			
Front track	C1	1795			
Rear track	C2	1660			
Minimum Road Clearance	-	185			
WEIGHT (kg)					
Unladen weight ⁴		3765	3780	3825	3855
Unladen weight front axle		2355	2350	2375	2395
Unladen weight rear axle		1410	1430	1450	1460
Minimum weight vehicle equipped		3980			
Gross vehicle weight		11000			
Front/rear total weight		4000 / 7600			
Max trailer weight unbraked/braked		750 / 3500			
<ol style="list-style-type: none"> The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications) Excluding turn signal and side mirrors Possible widths with optional mirror brackets short 2220/2286 – medium 2286/2406 – large 2406/2500 The Unladen weight include spare wheel, full fuel tank and driver 75 kg. AMT: +25 kg 					

ALL DATA MUST BE CONFIRMED BY THE TYPE APPROVAL CERTIFICATE

Note: Dimensions and weight are given as guide only. Bodybuilders are responsible for ensuring all legal requirements are met. Isuzu shall have no liability whatsoever should information supplied have incorrect data, description or illustrations.

AIR SUSPENSION OBD-C - 11 ton


W/B (mm) J 3790 - K 4060 - M 4660 - N 4990

NOVEMBER 2019

€ 55.200,00 VAT excluded

Equipment	Automated transmission NEES 2 with HSA	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake • Steering wheel adjustable for height and depth • Air suspension seat • Electric windows • Side mirrors heated and electric • Warning reverse • Radio with Bluetooth – USB DAB+ • Immobilizer • Central locking with remote control • Cruise control • Daytime running light • Fog lamps • Head lamps control leveling 	
Engine	<p>ISUZU 4HK1E6C Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 5193 cm³ Power max 154kW (210HP) at 2400 rpm Torque max 706 Nm a 1600 rpm Emission level EURO VI update OBD-C</p>	
Tank capacity	Fuel	Lt 140 Ad-Blue® Lt 16
Safety system	<p>ABS ESC – Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bag driver</p>	
Transmission ratios	<p>6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio W/B J 5.125 (41/8) - Final gear ratio other W/B 4.555 (41/9)</p>	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	<p>Width 60 mm, height 225 mm (only W/B H height minimum 124,6 mm), thickness 6 mm</p>	
Seat number	3	
Axle	2, rear drive with twin wheels	
Tire	Front 235/75 R17,5 simple; rear 235/75 R17,5 double	
Brake	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: air over hydraulic dual circuit.	
Suspension	Front: Multi taper leaf spring. Rear: 4-bag Air Suspension with height control. Front and rear stabilizer shaft	
Electrical system	2 battery 110 A - System 24V - Generator 90A	

AIR SUSPENSION OBD-C - 12 ton

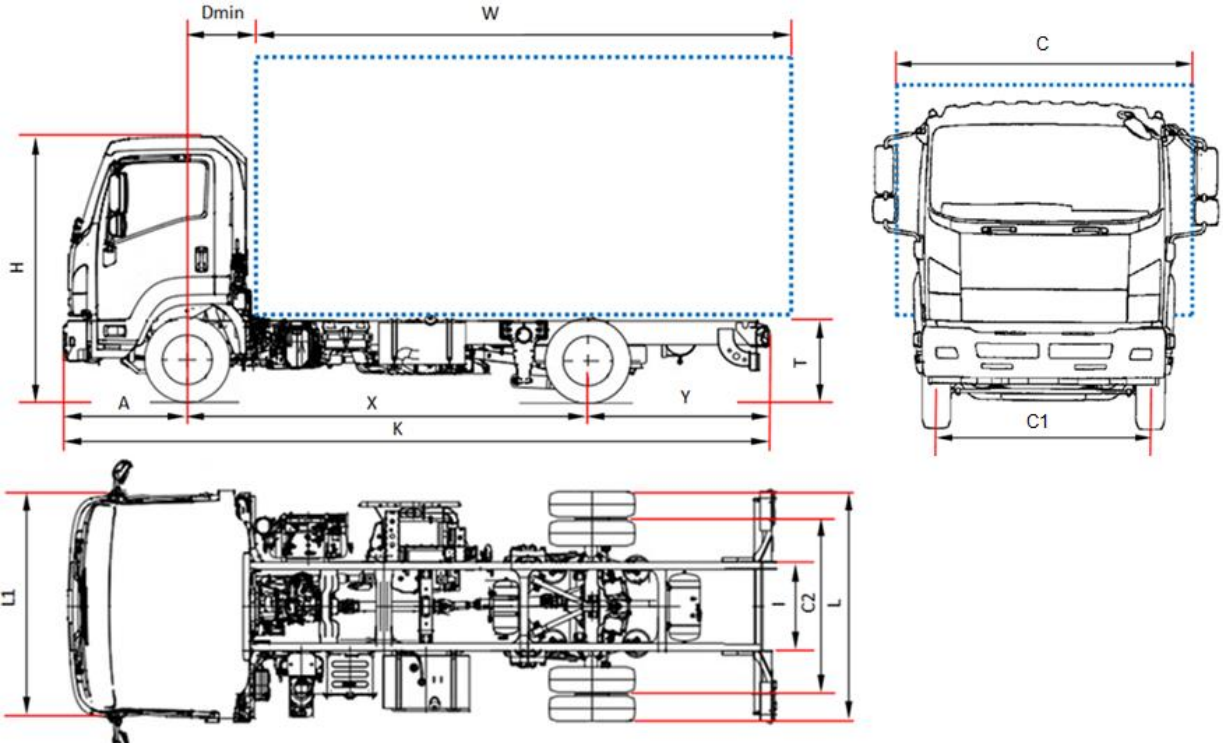DIMENSIONS (mm)					
					
MODEL NAME		F 12 J	F 12 L	F 12 N	F 12 Q
Wheelbase	X	3790	4360	4990	5320
Overall length	K	6620	7490	8390	8690
Body length min ¹	W	4735	5605	6505	6805
Body length max ¹	W	5085	5955	6855	7155
Rear overhang	Y	1665	1955	2225	2195
Chassis height (unladen)	T	785			
Overall height (unladen)	H	2585			
Rear axle width	L	2220			
Cab width ²	L1	2195			
Body width ³	C	2500 / 2550			
Front axle to back of cab	Dmin	710			
Front overhang	A	1175			
Frame internal size	I	840			
Front track	C1	1805			
Rear track	C2	1670			
Minimum Road Clearance	-				
WEIGHT (kg)					
Unladen weight ⁴		4155	4215	4285	4295
Unladen weight front axle		2650	2690	2715	2725
Unladen weight rear axle		1505	1525	1570	1570
Minimum weight vehicle equipped					
Gross vehicle weight		11990			
Front/rear total weight		4480 / 8480			
Max trailer weight unbraked/braked		750/3500			
<ol style="list-style-type: none"> The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). Excluding turn signal and side mirrors Possible widths with optional mirror brackets short 2220/2286 – medium 2286/2406 – large 2406/2500 The Unladen weight include spare wheel, full fuel tank and driver 75 kg. AMT: +25 kg 					

ALL DATA MUST BE CONFIRMED BY THE TYPE APPROVAL CERTIFICATE

Note: Dimensions and weight are given as guide only. Bodybuilders are responsible for ensuring all legal requirements are met. Isuzu shall have no liability whatsoever should information supplied have incorrect data, description or illustrations.

AIR SUSPENSION OBD-C - 12 ton

W/B (mm) J 3790 - L 4360 - N 4990 - Q 5320

NOVEMBER 2019

€ 59.100,00 VAT excluded

Equipment	Automated transmission NEES 2 with HSA	€ 1.290,00 VAT excluded
Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake • Steering wheel adjustable for height and depth • Air suspension seat • Electric windows • Side mirrors heated and electric • Warning reverse • Radio with Bluetooth – USB DAB+ • Head lamps control leveling • Immobilizer • Central locking with remote control • Cruise control • Daytime running light • Fog lamps 	
Engine	ISUZU 4HK1E6C Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Variable-geometry turbocharger. Displacement 5193 cm ³ Power max 177kW (240HP) at 2400 rpm Torque max 765 Nm a 1600 rpm Emission level EURO VI update OBD-C	
Tank capacity	Fuel Lt 140	Ad-Blue® Lt 16
Safety system	ABS ESC (Electronic Stability Control) with ASR LDWS (Lane Departure Warning System) AEBS (Advanced Emergency Braking System) SRS air-bag driver	
Transmission ratios	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio W/B J 5.125 (41/8) - Final gear ratio other W/B 4.555 (41/9)	
Transmission control	MANUAL	NEES 2 – Automated T/M
Frame dimension	Width 60 mm, height 225 mm, thickness 6 mm	
Seat number	3	
Axle	2, rear drive with twin wheels	
Tire	Front 245/70 R19,5 simple; rear 245/70 R19,5 double	
Brake	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: Full Air dual circuit, electronically controlled EBS (Brake by wire)	
Suspension	Front: Multi taper leaf spring. Rear: 4-bag Air Suspension with height control. Front and rear stabilizer shaft	
Electrical system	2 battery 110 A - System 24V - Generator 90A	

MECHANIC SUSPENSION OBD-C - 14 ton

DIMENSIONS (mm)					
MODEL NAME		F 14 J	F 14 L	F 14 N	F 14 Q
Wheelbase	X	3790	4360	4990	5320
Overall length	K	6610	7480	8380	8680
Body length min ¹	W	4400	5200	6200	6750
Body length max ¹	W	4500	5350	6350	6900
Rear overhang	Y	1645	1945	2215	2185
Chassis height (unladen)	T	890	885	885	885
Overall height (unladen)	H	2600			
Rear axle width	L	2255			
Cab width ²	L1	2195			
Body width ³	C	2500 / 2550			
Front axle to back of cab	Dmin	710			
Front overhang	A	1175			
Frame internal size	I	840			
Front track	C1	1800			
Rear track	C2	1705			
Minimum Road Clearance	-	215			
WEIGHT (kg)					
Unladen weight ⁴		4100	4160	4220	4230
Unladen weight front axle		2620	2670	2710	2725
Unladen weight rear axle		1480	1490	1510	1505
Minimum weight vehicle equipped		4805			
Gross vehicle weight		14000			
Front/rear total weight		5000 / 9000			
Max trailer weight unbraked/braked		750 / 3500			
<ol style="list-style-type: none"> 1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications) 2. Excluding turn signal and side mirrors 3. Possible widths with optional mirror brackets short 2255/2286 – medium 2286/2406 – large 2406/2500 4. The Unladen weight include spare wheel, full fuel tank and driver 75 kg. AMT: +30 kg 					

MECHANIC SUSPENSION OBD-C - 14 ton

W/B (mm) J 3790 - L 4360 - N 4990 - Q 5320

NOVEMBER 2019

€ 59.100,00 VAT excluded

Equipment	Automated transmission NEES 2 with HSA	€ 1.290,00 VAT excluded
------------------	--	-------------------------

Standard features	<ul style="list-style-type: none"> • EGR – DPD (Diesel particulate diffuser) • SCR con Ad-Blue® • Multi information display • Air conditioning • Speed limiter (90km/h) • Rear lock differential 	<ul style="list-style-type: none"> • Engine exhaust brake • Radio with Bluetooth – USB DAB+ • Steering wheel adjustable for height and depth • Air suspension seat • Electric windows • Side mirrors heated and electric 	<ul style="list-style-type: none"> • Head lamps control leveling • Immobilizer • Central locking with remote control • Cruise control • Daytime running light • Fog lamps • Warning reverse
--------------------------	--	--	--

Engine	ISUZU 4HK1E6H Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. Displacement 5193 cm ³ Power max 177kW (240HP) at 2400 rpm Torque max 765 Nm a 1600 rpm Emission level EURO VI update OBD-C
---------------	--

Tank capacity	Fuel	Lt 140	Ad-Blue®	Lt 16
----------------------	------	--------	----------	-------

Safety system	ABS ESC – Electronic stability control with ASR LDWS – Lane Departure Warning System AEBS (Advanced Emergency Braking System) SRS air-bag driver
----------------------	---

Transmission ratios	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 5.571(39/7)
----------------------------	--

Transmission control	MANUAL	NEES 2 – Automated T/M
-----------------------------	--------	------------------------

Frame dimension	Width 60 mm, height 225 mm, thickness 6 mm
------------------------	--

Seat number	3
--------------------	---

Axle	2, rear drive with twin wheels	2, rear driv
-------------	--------------------------------	--------------

Tire	Front 265/70 R19,5 simple; rear 265/70 R19,5 double
-------------	---

Brake	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: Full Air dual circuit, electronically controlled EBS (Brake by wire)
--------------	---

Suspension	Front and rear: Multi taper leaf spring. Front and rear stabilizer shaft
-------------------	--

Electrical system	2 battery 110 A - System 24V - Generator 90A
--------------------------	--

AIR SUSPENSION OBD-C - 14 ton

DIMENSIONS (mm)					
MODEL NAME		F 14N J	F 14N L	F 14N N	F 14N Q
Wheelbase	X	3790	4360	4990	5320
Overall length	K	6610	7480	8380	8610
Body length min ¹	W	4735	5605	6505	6805
Body length max ¹	W	5085	5955	6855	7155
Rear overhang	Y	1645	1945	2215	2185
Chassis height (unladen)	T	785			
Overall height (unladen)	H	2550			
Rear axle width	L	2220			
Cab width ²	L1	2195			
Body width ³	C	2500 / 2550			
Front axle to back of cab	Dmin	710			
Front overhang	A	1175			
Frame internal size	I	840			
Front track	C1	1800			
Rear track	C2	1670			
WEIGHT (kg)					
Unladen weight ⁴		4270	4330	4400	4410
Unladen weight front axle		2685	2735	2775	2790
Unladen weight rear axle		1585	1595	1625	1990
Gross vehicle weight		14000			
Front/rear total weight		5000 / 9000			
Max trailer weight unbraked/braked		750/3500			
5. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). 6. Excluding turn signal and side mirrors 7. Possible widths with optional mirror brackets: short 2220/2286 – medium 2286/2406 – large 2406/2500 8. The Unladen weight include spare wheel, full fuel tank and driver 75 kg. AMT: +25 kg					

ALL DATA MUST BE CONFIRMED BY THE TYPE APPROVAL CERTIFICATE

Note: Dimensions and weight are given as guide only. Bodybuilders are responsible for ensuring all legal requirements are met. Isuzu shall have no liability whatsoever should information supplied have incorrect data, description or illustrations.

AIR SUSPENSION OBD-C - 14 ton

W/B (mm) J 3790 - L 4360 - N 4990 - Q 5320

NOVEMBER 2019

€ 60.600,00 VAT excluded

Equipment:	Automated transmission NEES 2 with HSA	€ 1.290,00 VAT excluded
Standard features:	<ul style="list-style-type: none"> • EGR - DPD (Diesel particulate diffuser) • SCR with Ad-Blue® • Multi information display • Air conditioning • Speed limiter (90km/h) • Engine exhaust brake • Steering wheel adjustable for height and depth • Air suspension seat • Electric windows • Side mirrors heated and electric • Warning reverse • Radio with Bluetooth – USB DAB+ • Head lamps control levelling • Immobilizer • Central locking with remote control • Cruise control • Daytime running light • Fog lamps 	
Engine:	<p>ISUZU 4HK1E6H Diesel, 4 cylinders 16-valve, common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. Displacement: 5193 cm³ Power max: 177 KW (240HP) at 2400 rpm Torque max: 765 Nm at 1600 rpm Emission level: EURO VI update OBD-C</p>	
Tank capacity:	Fuel	Lt 140 Ad-Blue® Lt 16
Safety system:	<p>ABS ESC (Electronic Stability Control) with ASR LDWS (Lane Departure Warning System) AEBS (Advanced Emergency Braking System) SRS air-bag driver</p>	
Transmission ratios:	<p>6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse: 6.615; Final gear ration: 5.571(39/7)</p>	
Transmission control:	MANUAL	NEES 2 – Automated T/M
Frame dimension:	Width: 60 mm, height: 225 mm, thickness: 6 mm	
Seat number:	3	
Axle	2, rear drive with twin wheels	
Tire:	Rear 265/70 R19,5 double	
Brake:	<p>Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: Full Air dual circuit, electronically controlled EBS (Brake by wire)</p>	
Suspension:	<p>Front: Multi taper leaf spring. Rear: 4-bag Air Suspension with height control. Front and rear stabilizer shaft.</p>	
Electric system:	2 battery 110 Ah – System 24V - Generator 90A	

ISUZU

Série Bleu 

BROCHURE 2019 N-F SERIES

Version OBD-C

For further information

ISUZU MOTORS LIMITED

www.isuzu.it

www.isuzu.fr

www.isuzu.ch

www.isuzu.es

www.isuzutrucks.cz

www.isuzutrucks.sk

www.isuzutrucks.pl

www.isuzuromania.com.ro

www.isuzutrucks.hu

The information in this catalogue is intended to be of a general nature only. Midi Europe reserves the right to modify or change specification at any time. For further information consult our technical department. Color of the vehicle shown in this catalogue could be differ from the real color of the vehicle.

Midi Europe advises:

