
N 35 ISUZU

Série Bleu OBD-D (3,5 ton

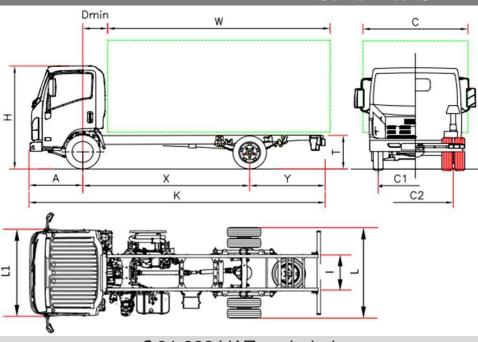

€ 31.692 VAT excluded						
N 35		N35 F	N 35 H	N 35 K	N 35 L	
Wheelbase	Х	2800	3395	3845 ⁽⁵⁾	4175 ⁽⁵⁾	
Overall length	K	5235	6085	7032	7565	
Body lenght min. (1)	W	3415	4265	5212	5745	
Body lenght Max. (1)	W	3710	4555	5442	5970	
Rear overhang	Υ	1325	1580	2077	2280	
Chassis height	Т	730	720	720	720	
Overall height	Н	2225				
Rear axle width	L	1925				
Cab width ⁽²⁾	L1	2040				
Body width ⁽³⁾	С	2345				
Front axle to back of cab	D min	7 10 ⁽⁷⁾				
Front overhang	Α	1110				
Frame internal size	I	750				
Front track	C1	1680				
Rear track	C2	1485				
Minimum Road Clearance	-	190				
Turning diameter (m) (4)	-	10,0	11,8	13,2	14,2	
WEIGHT (kg)						
Unladen weight ⁽⁶⁾		2385	2430	2480	2530	
Unladen weight front axle		1670/715	1680/750	1705/775	1730/800	
Minimum weight vehicle equipped		2585				
Gross Vehicle Weight (GVW)		3500				
Front/rear total weight		2100 / 2435				
Max trailer weight unbraked/Max trailer weight braked		750/ 3500				

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). Excluding turn signal and side mirrors

 Possible widths with optional mirror brackets:2040/2170 2170/2345 2345/2500

 Curb to curb turning diameter

 Wheelbase modified (see thw optional equipment)

 The Unladen weight include spare wheel, full fuel tank and driver, optional excluded.

 NEES II 650.

$N\ 35$ - Wheelbase (mm) F 2800 - H 3395 - K 3845 - L 4175

FEBRUARY 2021		€ 31.692 ^{(**}			
Equipment	NEES 2	€ 1290 ^(**)			
		(**)VAT excluded			
Standard features					
 EGR - DPD - SCR MID display Side mirrors heated and electric Engine exhaust brake 	 Immobilizer Central locking with remote control Suspended seat Power operated windows Steering adjustable (tilting and height) 	 Radio DAB+ with USB Fog lamps Fr and Rr Head lamps control levelling Day-time running lights 			
	Air conditioning	€ 1089 ^(**)			
Optional	 Wheelbase modified 	Ask to your dealer			
	Body builder Controller	€ 354 ^(**)			
	Intercooler, common-rail with direct injection Variable-geometry turbocharger DISPLACEMENT 2999 cm ³ POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.				
Safety systems	ABS with BAS (Brake Assist System) ESC (Electronic Stability Control) with ASR SRS Driver Airbag				
Tank	90 L	16 L Ad-Blue [®]			
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 Reverse 5.068; Final gear ratio 3.909 (43/11)	- 1.000 - 0.721;			
Transmission control	Manual	NEES 2			
Dimensions of the chassis	Width 70 mm, Height 214 mm, Thickness 5 mm				
Number of seats	3				
Axle	2 the rear one with twin wheels.				
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.				
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.				
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.				
Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah				