


# OBD-E

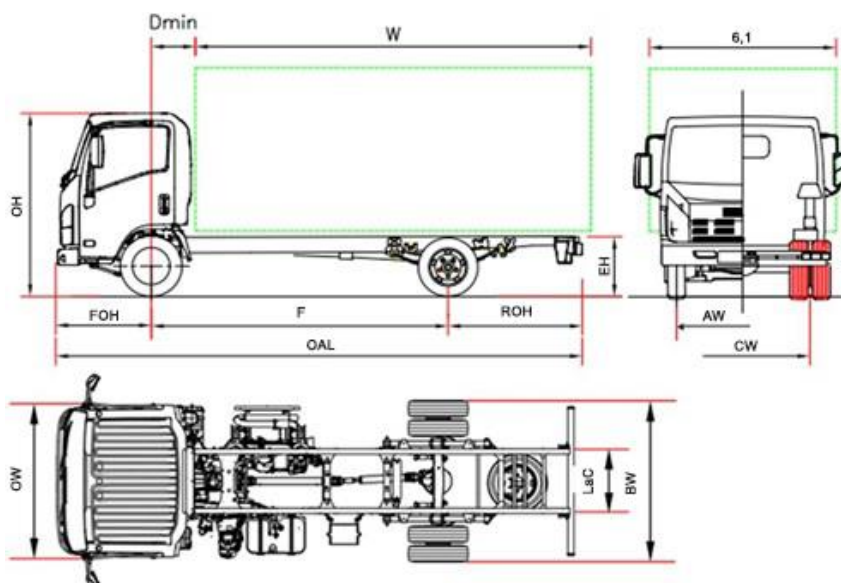

P 65		P65 H	P 65 K
Wheelbase	F	3365	3815
Overall length	OAL	6040	6690
Body length min. <sup>(1)</sup>	W	4280	4910
Body length Max. <sup>(1)</sup>	W	4600	5250
Rear overhang	ROH	1565	1765
Chassis height	EH	800	
Overall height	OH	2250	
Rear axle width	BW	2115	
Cab width <sup>(2)</sup>	OW	2040	
Body width <sup>(3)</sup>	6,1	2345	
Front axle to back of cab	D min	670 <sup>(6)</sup>	
Front overhang	FOH	1110	
Frame internal size	LaC	850	
Front track	AW	1680	
Rear track	CW	1650	
Minimum Road Clearance	HH	185 <sup>(8)</sup>	
Turning diameter (m) <sup>(4)</sup>	Dia	12,6	14,1
<b>WEIGHT (kg)</b>			
Unladen weight <sup>(5)</sup>		2600	2640
Unladen weight front axle		1730/870	1750/890
Gross Vehicle Weight (GVW) <sup>(7)</sup>		6500	
Front/rear total weight		3100 / 4600	
Max trailer weight braked/ Max trailer weight unbraked		3500 / 750	

1. The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications).
2. Excluding turn signal and side mirrors
3. Possible widths with optional mirror brackets 2115/2170 – 2170/2345 – 2345/2465
4. Curb to curb turning diameter
5. The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES II + 35 kg.
6. With minimum counterframe height = 100 mm
7. Clearance point: rear differential

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.

# P 65 - Wheelbase (mm) H 3365 - K 3815

JANUARY 2024

Equipment	NEES 2
-----------	--------

## Standard features

- EGR - DPD - SCR
- MID display
- Engine exhaust brake
- Reverse warning buzzer
- Immobilizer
- Seat belt buzzer
- Central locking with remote control
- Cab overturning safety
- Suspended seat
- Side mirrors heated and electric
- Radio DAB+, USB, Bluetooth
- Head lamps control levelling
- Fog lamps Fr and Rr
- Front led lights
- Day-time running lights
- Automatic headlight lighting
- Steering adjustable (tilting and height)
- Speed limiter (90km/h)

Optional	. Air conditioning
----------	--------------------

Engine	<p><b>ISUZU 4JZ1E6N 4 cylinders.</b>            16 v with exhaust variable valve timing and gearing cascade distribution. DENSO i-Art Common rail injection system with VGS turbo (electronic control) and intercooler.            DISPLACEMENT 2999 cm<sup>3</sup>            POWER 110kW (150 hp) 2800 rpm            TORQUE 375 Nm 1280 – 2800 rpm            EMISSIONS REGULATIONS EURO VI OBD-E.</p>
--------	---

Safety systems	<p>ABS  <b>ESC (Electronic Stability Control) with ASR</b>  <b>LDWS</b>  <b>AEBS (pedestrian recognition)</b>            SRS 2 Airbag (Driver/Pass.)</p>
----------------	--

Tank	90 L	14 L Ad-Blue®
------	------	---------------

Gearbox and Final drive ratio	6 gear MYY6Z – 5.979 - 3.434 – 2.040 – 1.379 - 1.000 - 0.708; Reverse 5.701; Final gear ratio 4.556 (41/9)
-------------------------------	--

Transmission control	Manual	NEES 2
----------------------	--------	--------

Dimensions of the chassis	Width 70 mm, Height 214 mm, Thickness 5 mm
---------------------------	--

Number of seats	3
-----------------	---

Axle	2 the rear one with twin wheels.
------	-------------------------------------

Tires	Front 215/75 R17,5C simple. Rear 215/75 R17,5C dual.
-------	---

Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.
--------	--

Suspensions	Front parabolic crossbows, rear semielliptical integrated by rubber end-of-stroke pads; hydraulic telescopic shock absorbers with double effect. Front and rear stabilizer bar.
-------------	---

Electric system	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah
-----------------	--

PROVISIONAL VERSION: All data must be confirmed by the type approval certificate.